

Lime Dosing

Continuous Single Shaft Mixers WAH



1



Description ▼

WAH is a Continuous Horizontal Single Shaft Mixer suitable for dry bulk solids (powders, granules, short fibres), dry bulk solids with liquids (conditioning & granulating), sludges and pastes.

WAH Mixers operate on the principle of a mechanically generated fluid bed. Ploughshare or shovel-shaped mixing tools rotate around a horizontal shaft close to the cylindrical drum casing lifting the components to be mixed from the product bed into the open mixing area. The quality of the mixture is achieved before the product reaches the mixer outlet.

Function ▼

The horizontal single shaft mixer WAH is based on the principle of mechanical fluidisation of the product.

The particular shape, position and rotation speed of the mixing tools, creates a centrifugal vortex motion which allows the products to be projected in a three-dimensional way and to merge with each other.

This ensures that components with different particle size and bulk density are perfectly blended and mixed with high precision within the shortest possible time.



Application ▼

MAP® stands for robust and efficient systems for the mechanical, chemical and thermal treatment of sludge, ashes, dust and other residual materials in the disposal lines of local authorities and the industrial sector.

MAP® products cover broad areas in the treatment of sludge, fly ash and residual materials.

- Treatment of sludges and slurries
- Treatment of soils
- Treatment of dusts and ashes
- Treatment of other residual materials / contaminated materials
- Power stations: mixing technology for the micro-granulation of fly ash
- Waste incineration plants
- Sewage sludge / Biosolids
- Moistening and conditioning

Benefits ▼

- ✓ Long-term experience in environmental application;
- ✓ High speed mixing (short mixing time);
- ✓ Durable machine;
- ✓ Minimum wear/low maintenance;
- ✓ Easy access to all internal parts of the machine for maintenance;
- ✓ High productivity.

Lime Dosing


Continuous Single Shaft Mixers WAH



Technical Features / Performance ▼

- ▶ From 75 up to 15,000 litres volume
- ▶ 304L / 316L SS, antiwear materials, antiwear material
- ▶ Different mixing tools
- ▶ Choppers and liquid injection
- ▶ Great variety of accessories and options available
- ▶ Adjustable front discharge
- ▶ Specially design drive units

Overall Dimensions ▼

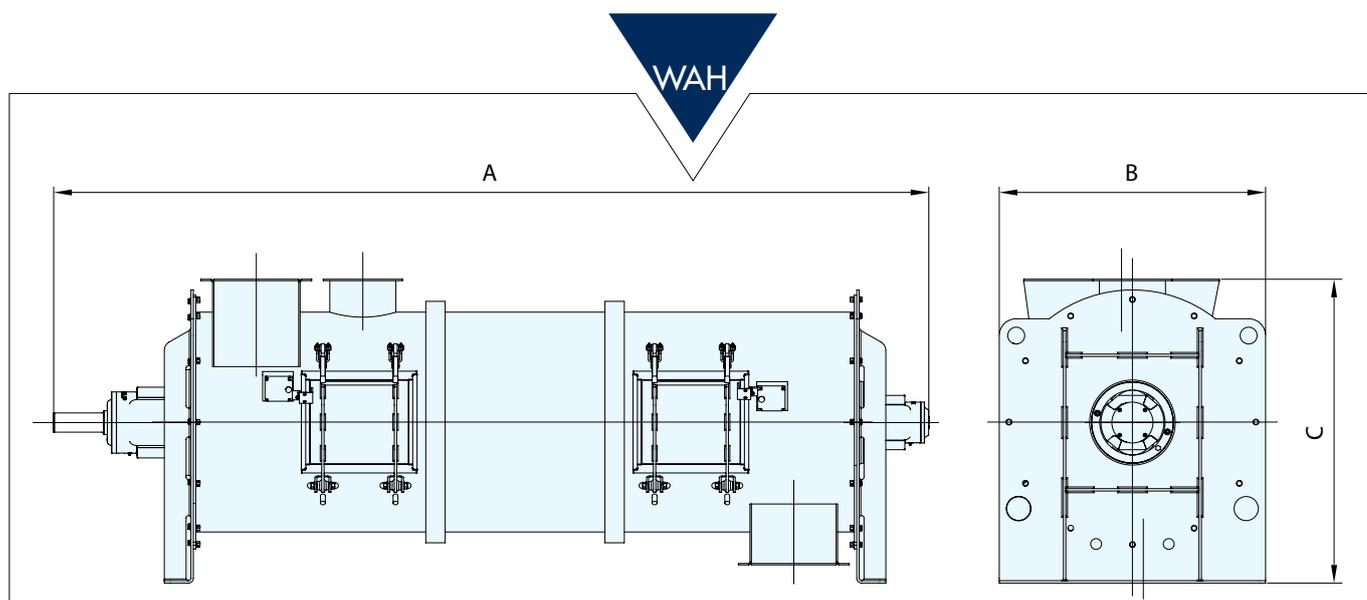

	A	B	C	50% dm^3/h Residence Time		Empty Weight (kg)
				60 s	180 s	
WAH 00075	1,690	485	556	2,022	674	210
WAH 00150	1,960	570	634	4,031	1,344	350
WAH 00300	2,220	670	801	7,892	2,631	580
WAH 00500	2,550	770	920	13,716	4,572	840
WAH 01000	3,140	930	1,118	27,993	9,331	1,390
WAH 01800	3,670	1,100	1,265	50,170	16,723	2,100
WAH 03000	3,920	1,340	1,472	82,577	27,526	2,800
WAH 04800	4,510	1,500	1,800	134,281	44,760	3,800
WAH 06000	4,816	1,600	1,860	165,708	55,236	4,500
WAH 08800	5,325	1,810	2,133	245,796	81,932	5,840
WAH 10500	5,580	1,910	2,237	295,322	98,441	6,600
WAH 15000	6,090	2,110	2,465	411,885	137,295	8,200

Dimensions in mm

This datasheet does not show the complete range but only the models most suitable for the application.